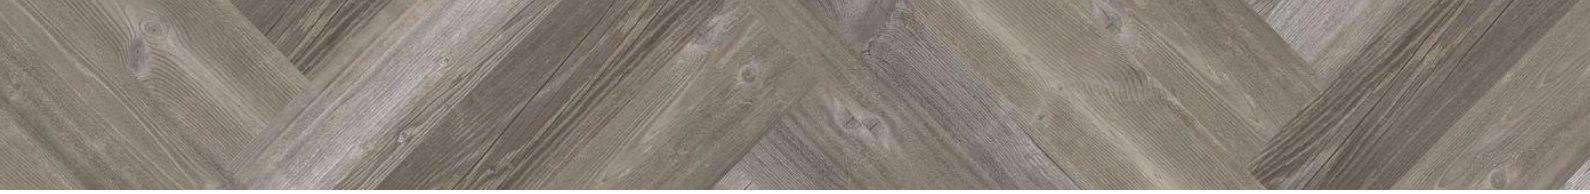

ArtiFloor

PREMIUM HERRINGBONE

PRODUCT SPECIFICATIONS

Technical Data

Type	Vinyl LVT	**Finish**	Matte
Dimensions	914.4mm (L) x 152.4mm (W)	**Surface**	Embossed
Plank Thickness	4.5mm	**Wear Layer**	0.5mm
Planks per Carton	12	**Profile**	Square Edge
M² per Carton	1.67m²	**KG per Carton**	13kg
M² per Pallet	120.24m²	**KG per Pallet**	936kg
Installation Method	Glue-down	**Surface Coating**	Antibacterial UV Coating

Performance		**Standard**
Slip Resistance	P3	AS 4586-2013
Fire Rating	CHF Value 9.4 kW/m² Smoke Value 138%.min	AS ISO 9239.1-2003
Acoustic	$L'_{nT,w}$ 52 /200mm Slap	ISO 16283-2:2015 & 717-2:2013
Colour Fastness	6	EN ISO 105-B02
Chemical	Pass	ISO 26987
Heavy Metal Content	Pass	IEC 62321

Warranty

Residential	Lifetime	**Commercial**	15 Years

Wear & Scratch Resistant

100% Waterproof

Antibacterial Coating

Easy Install & Repair

Noise Insulating