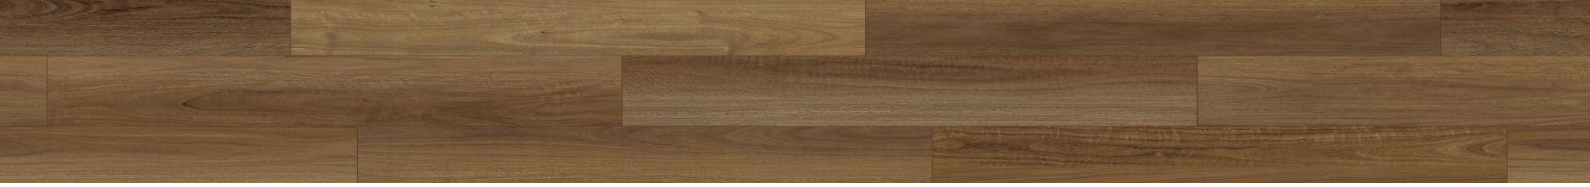

ArtiFloor

HYBRID 9.5

PRODUCT SPECIFICATIONS

Technical Data

Type	Hybrid	**Finish**	Matte
Dimensions	1860mm (L) x 228mm (W)	**Surface**	Embossed
Plank Thickness	9.5mm	**Wear Layer**	0.5mm
Planks per Carton	4	**Profile**	Fold-Down Click-Lock
M² per Carton	1.6963m²	**KG per Carton**	22.3kg
M² per Pallet	88.2076m²	**KG per Pallet**	1,159.6kg
Installation Method	Floated on Sub-Floor	**Surface Coating**	Antibacterial UV Coating
Backing Thickness	2mm	**Click System**	5G Valinge

Performance		**Standard**
Slip Resistance	P3	AS 4586:2013
Fire Rating	CHF Value 9.3 kW/m² Smoke Value 27%.min	AS ISO 9239.1-2003
Acoustic	$L'_{nT,w}$ 38	ISO 717-2:2014
Total VOC	0.020mg/m²/hr	ASTM D5116-17
Underfloor Heating	Suitable for Hydronic Underfloor Heating *under 26°C*	

Warranty

Residential	Lifetime (Structural) 25 years (Wear)	**Commercial**	15 Years

Wear & Scratch Resistant

100% Waterproof

Antibacterial Coating

Easy Install & Repair

Noise Insulating