

TECHNICAL DATA SHEET

Evolution Premium Generation Hybrid flooring.



ARTI FLOOR

DESCRIPTION

9.5mm Hybrid range exemplifies the perfect fusion of quality and design, making it an ideal choice for elevating any home interior. Its natural-looking grain and knot patterns deliver an authentic feel. Each pattern is meticulously created to capture the natural aesthetics of real wood. The hues span from softer tones to darker nuances, effectively brightening any space. The refined bevels of each board contribute to a luxurious yet natural look, enhancing the overall ambiance of the room.




TECHNICAL DATA

Information	Result
Length size:	1860mm
Width Size:	228mm
Thickness:	9mm
Wear Layer:	0.5mm
Backing Thickness:	2mm
Pack Size:	1.6963
Pack Pcs:	4 Pcs
Pack Weight:	22.5kg
Click System:	5G Valinge
Surface:	Embossed Matt
Surface Finish	UV Coating
Patterns Repeat:	20 Pcs Non-Repeat

INSTALLATION

✓ Indoor/Outdoor:	Indoor Only
✓ Floated on subfloor:	Yes
✗ Floated on underlay:	No
✗ Glue Down:	No
✗ Nailed:	No
✓ Over Hydronic Heated Subfloor:	Yes

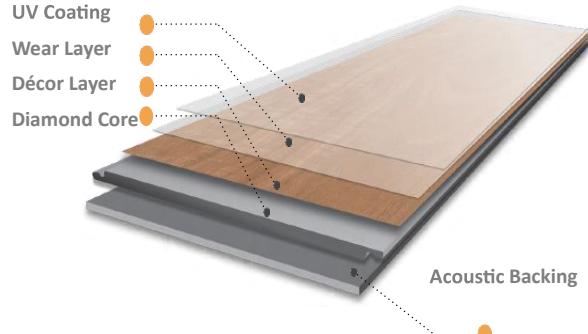

TEST RESULT

Test Attributes	Standard	Result
Acoustic impact noise:	AS/NZ ISO 717.2-2004	FIIC4,5 = 64, L'nTw3 = 38, AAAC 6 Star Rating1
Australian Reaction to fire:	AS/NZ ISO9239 1-2003	CHF: 9.3kW/m2, Smoke value: 27%.min
Slip Test:	AS 4586:2013	SRV37/P3
Total VOC:	ASTM D5116-17	0.020mg/m2/hr (Max allowable 0.5)
Underfloor Heating:		Suitable for hydronic underfloor heating Under 26°C